


RevNo	Revision note	Date
△1		
△2		
△3		

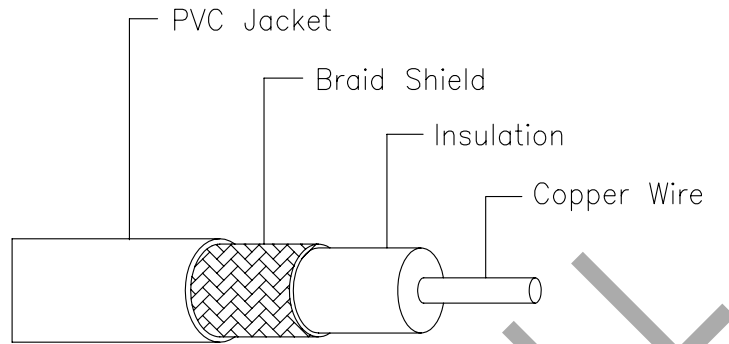

ELECTRICAL PROPERTIES :  
 Impedance : 75 Ohms  
 Capacitance Conductor to Shield : 69 pF/m

ATTENUATION : @ 68 °F (20 °C)

@ Frequency MHz	dB/km
1 MHz	71 dB
10 MHz	96 dB
30 MHz	130 dB
200 MHz	350 dB

CONSTRUCTION DETAILS


CENTER CONDUCTOR :  
 30AWG (1/0.26mm) Solid Bare Copper Wire

INSULATION : PE  
 Nominal Diameter Over Insulation : 1.60 mm  
 Nominal Insulation Thickness : 0.67 mm

SHIELD :  
 Bare Copper Wire Braid Shield 95% Coverage

JACKET : PVC  
 Nominal Diameter Over Jacket : 2.90 mm  
 Nominal Jacket Thickness : 0.40 mm

LISTING AND RATINGS : UL TYPE AWM

Designed by - date	Checked by - date	Approved by - date	Date 25/09/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name	JIS COAXIAL CABLE	Unit -
			Part No.	1.5C-2V	Issued 1
			Ref. No.		Sheet
			Used On.		1 of 1