


Computer Cable

Multiconductors Foiled Shielded

Overall Foiled shielded

UL AWM 2464

80 °C, 300 Volt

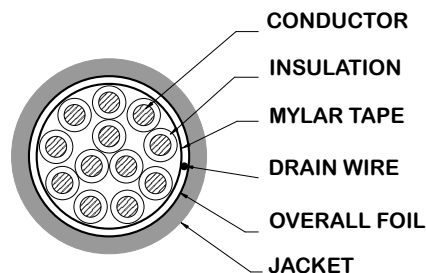

Conductor : Stranded concentric tinned copper


Insulation : 80 °C SRPVC

Shield : 100% coverage, aluminium polyester foil shield

Drain Wire : 7 strands tinned copper

Jacket : Ivory PVC

Application : For computer and peripherals connection use. Passes UL FT1 flame test.

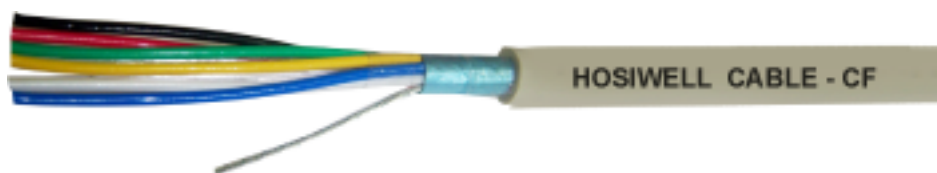

UL File No. : E131077, CSA File No. : LL 80602
 UL Type AWM 2464 and CSA type AWM FT1 Listed)

Standard	No/mm.	AWG	No. of cores	Insulation Diameter	Jacket material	Normal OD.(mm)	Jacket color	Part Number
UL type	7/0.16	26	4	1.00	PVC	4.7	Ivory	CF642604C
AWM 2464	7/0.16	26	6	1.00	PVC	5.3	Ivory	CF642606C
	7/0.16	26	7	1.00	PVC	5.3	Ivory	CF642607C
CSA type	7/0.16	26	9	1.00	PVC	5.9	Ivory	CF642609C
AWM	7/0.16	26	16	1.00	PVC	7.0	Ivory	CF642616C
FT1	7/0.16	26	37	1.00	PVC	9.5	Ivory	CF642637C

For outdoor use : Double jacket or with steel messenger wire available.