

Description :

RGB Signal Wire

28AWG (7/0.127mm) Tinned Copper Wire

Insulation : Foam PE

Insulation Thickness : 0.60 mm

Insulation Diameter : 1.60 mm

Insulation Color : Red, Green, Blue

Each Insulation Tinned Copper Wire Spiral Shield

Jacket : PVC

Jacket Thickness : 0.32 mm

Jacket Diameter : 2.50 mm

Jacket Color : Red, Green, Blue

4 Core Power Wire

24AWG (7/0.20mm) Tinned Copper Wire

Insulation : SR-PVC

Insulation Thickness : 0.24 mm

Insulation Diameter : 1.10 mm

Insulation Color : White, Black, Yellow, Brown

Construction

Each Conductors twisted together with Aluminum mylar tape,
Tinned copper wire 24AWG (7/0.20mm) worked as drain wire
and also Braid Shield 95% Coverage


Jacket : PVC


Jacket Thickness : 0.75 mm

Overall Diameter : 8.20 mm

Voltage Rate : 30V

Temperature Rate : 75°C

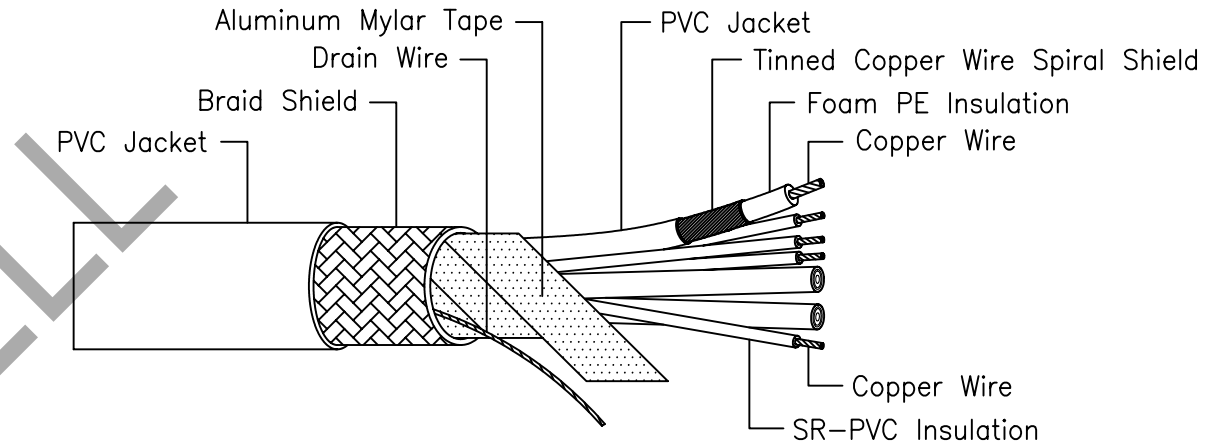

Designed by date	Checked by - date	Approved by - date	Date 9/04/2009	Size A4	Scale -
 HOSIWELL TECHNOLOGY CO., LTD.			Part Name	VGA CABLE	Unit -
			Part No.	RGB3+4	Issued 1
			Ref. No.		Sheet
			Used On.		1 of 1