


Security and Alarm Cable

Multiconductors Unshielded

Unshielded multiconductor
 UL subject 444 type CM
 NEC articles 800
 75 °C, 300 Volt

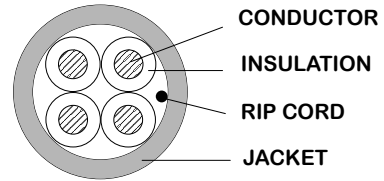

Conductor : Fine stranded concentric bare copper

Insulation : PE

Jacket : White PVC

Application : For security and alarm system use. Passes UL type CM vertical tray flame test.

Installed in cable trays, raceways and conduit.



UL File No. : E135928,
 (UL type CM)

Standard	No./mm.	AWG	No. of cores	Insulation diameter	Jacket material	Normal OD.(mm)	Jacket color	Part Number
UL type CM	7/0.20	24	2	1.01	PVC	3.2	White	8007
	7/0.20	24	4	1.01	PVC	3.6	White	8008
	7/0.20	24	6	1.01	PVC	4.2	White	8009
	7/0.20	24	8	1.01	PVC	4.5	White	8010
	7/0.20	24	12	1.01	PVC	5.4	White	8011
	7/0.26	22	4	1.19	PVC	4.1	White	8012
	7/0.26	22	6	1.19	PVC	4.8	White	8013
	7/0.26	22	8	1.19	PVC	5.1	White	8014
	7/0.26	22	12	1.19	PVC	6.1	White	8015

