


RevNo	Revision note	Date
△		
△		
△		

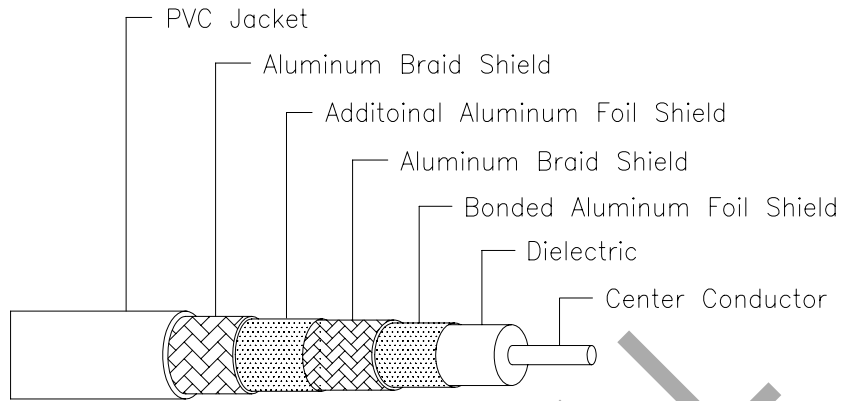

**CONSTRUCTION DETAILS**

**CENTER CONDUCTOR :**

18AWG Copper-Clad Steel  
Nominal Diameter 0.040" (1.02 mm)

**DIELECTRIC :**

Gas Expanded Polyethylene  
Nominal Diameter Over Dielectric : 0.180" (4.57 mm)

**SHIELD :**

- 1<sup>st</sup> Shield : Aluminum-Polypropylene-Aluminum Laminated Tape with Overlap Bonded to the Dielectric  
Nominal Diameter Over Tape : 0.186" (4.72 mm)
- 2<sup>nd</sup> Shield : Aluminum Braid Wire 60% Coverage
- 3<sup>rd</sup> Shield : Non-Bonded Foil Shield
- 4<sup>th</sup> Shield : Aluminum Braid Wire 42% Coverage

**JACKET :**

Flame Retardant PVC Jacket  
Nominal Diameter Over Jacket : 0.300" (7.62 mm)  
Nominal Jacket Thickness : 0.030" (0.76 mm)

LISTING AND RATINGS : UL TYPE CATV

**ELECTRICAL PROPERTIES :**


Impedance : 75.0 ±3.0 Ohms

Velocity of propagation : 85.0% Nominal

Capacitance Conductor to Shield : 16.2 pF/ft (53.1 pF/m) Nominal

**ATTENUATION : @ 68 °F (20 °C)**

@ Frequency MHz	dB/100 ft. (MAX.)	dB/100 meters (MAX.)
5 MHz	0.57 dB	1.87 dB
55 MHz	1.50 dB	4.94 dB
211 MHz	2.87 dB	9.43 dB
250 MHz	3.12 dB	10.22 dB
270 MHz	3.24 dB	10.63 dB
300 MHz	3.43 dB	11.25 dB
330 MHz	3.61 dB	11.84 dB
350 MHz	3.72 dB	12.20 dB
400 MHz	4.00 dB	13.12 dB
450 MHz	4.28 dB	14.04 dB
500 MHz	4.51 dB	14.80 dB
550 MHz	4.76 dB	15.62 dB
600 MHz	4.98 dB	16.34 dB
750 MHz	5.62 dB	18.44 dB
870 MHz	6.09 dB	19.99 dB
1000 MHz	6.54 dB	21.46 dB

Designed by - date	Checked by - date	Approved by - date	Date 17/08/2009	Size A4	Scale -
 <b>HOSIWELL TECHNOLOGY CO., LTD.</b>			Part Name CATV/MATV Coaxial Drop Cable	Unit -	
			Part No. C-RG6-QS	Issued 1	
			Ref. No.	Sheet 1 of 1	
			Used On.		